

Emergency Lighting



Twin Spots

Bulkhead Style Units

**Exit Signs - Metal / Hanging / Recessed
Batteries**

Domed Circular Units

IP65 CFL Bulkheads + Emergency Tray

IP44 Decorative Bulkheads

Twin Spots

Powerful Twinspot Non-Maintained fittings for defined escape routes in interior applications. Ideal for use in warehouses, factories, long corridors and high bay industrial applications. Twin LED lamps supplied with fitting.

- IP20
- 230V, 50Hz
- Multi directional lamp heads
- High light output - 2 x 21W
- Robust construction - sheet steel body
- Key hole slot fixing points - for wall mounting
- Twin LED's give early warning of failure of each lamp & mains/charging status
- Conforms to BS EN 60598-2-22
- Battery life is greater than 3 hours in emergency mode



TS21TFNM

TS21TFNM

Requires 2 x 01 - 1537 - 12V 7Ah sealed lead acid batteries (batteries ordered separately)

Weight

8.2kg (incl batteries)

2.8kg (excl batteries)

Dimensions H370 x W315 x D115mm

01-1537

12V 7Ah sealed lead acid battery

Maintenance free leak proof battery with excellent charge acceptance and recovery capability

Weight: 2.7kg



01-1537

Bulkhead Style Units

Cost effective emergency luminaires for interior and exterior applications. Available in Non-Maintained (NM) and Maintained (M) versions. Each luminaire is constructed from impact resistant high gloss polycarbonate and can be wall or ceiling mounted. Our fresnel lens units feature RDL's patented clip fit covers.

- IP65
- Double Insulated
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Conforms to BS EN 60598-1, BS EN 4533-102.22
- Battery life is greater than 3 hours in emergency mode

Fresnel Lens

- Maximises light output as requires fewer fittings

FL296NM	Non-Maintained 8W
FL296M	Maintained 8W
BRICKLEGEND	Self adhesive eurogram kits

Weight: FL296NM 980g & FL296M 1025g

Dimensions H100 x W360 x D80mm



FL296M

Bulkhead Style


A293NM	8W, Non-Maintained 3 Hour
A293M	8W, Maintained 3 Hour
A293RK	Semi Recessing Kit in White

Weight: A293NM 970g, A293M 1015g

Dimensions H100 x W360 x D75mm



A293M

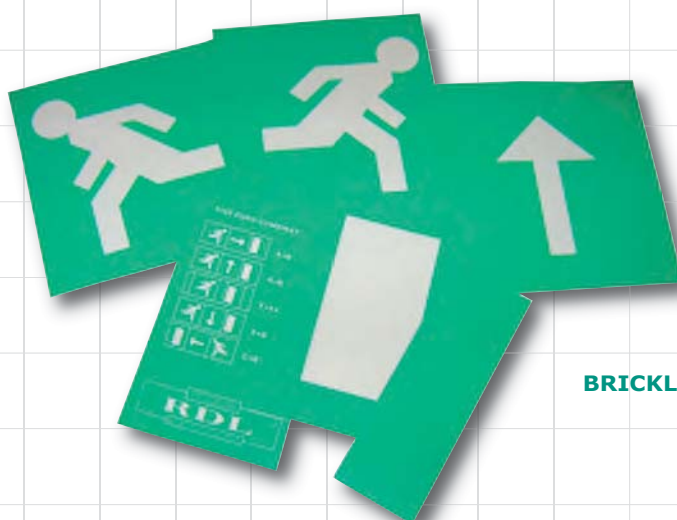

BRICKLEGEND

Full 'Exit' Size Polycarbonate Units

A range of shallow profile, cost effective emergency luminaires for interior and exterior applications, with clear prismatic covers

- IP65 Double Insulated
- Available in Non-Maintained (NM) , Maintained (M) and Sustained (S) versions
- Quick release cover
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Conforms to BS EN 60598-1, BS EN 4533-102.22 & BS EN 60924
- Battery life is greater than 3 hours in emergency mode
- Besa box fixing & 20mm knockout entries are supplied

IP65

A292NM 8W, Non-Maintained 3 hour


A292M 8W, Maintained 3 hour

A292S 8W, Sustained 3 hour

LEGEND Large Format Self adhesive eurogram kits

Weight: A292NM 1210g, A292M 1565g, A292S 1590g

Dimensions H175 x W380 x D75mm

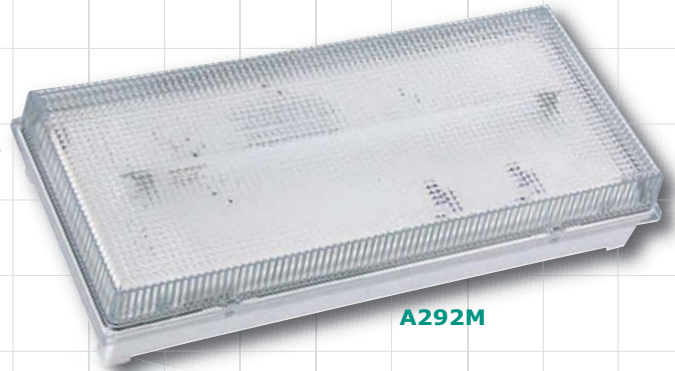

IP20

A291NM 8W, Non-Maintained 3 hour


A291M 8W, Maintained 3 hour

A291S 8W, Sustained 3 hour

LEGEND Large Format Self adhesive eurogram kits

Weight: A291NM 1145g, A291M 1510g & A291S 1530g

Dimensions H167 x W370 x D75mm

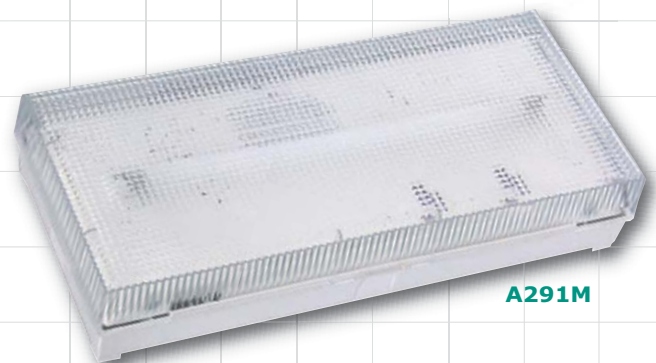

Exit Signs

Metal Exit Signs

A low profile easy fit robust range of single sided metal exit signs for interior applications. Available in Non-Maintained (NM) and Maintained (M) versions. Standard finish is white epoxy coating but also available in quality chrome and brass finish.

- IP20
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Conforms to BS EN 60598-2-22
- Battery life is greater than 3 hours in emergency mode



EXT8WM -Shown with Legend Panel **LPLA**

Metal Exit Signs

8W, Non-Maintained 3 hour

- EXT8WNM** White
- EXT8WNMBR** Brass
- EXT8WNMCH** Chrome

8W, Maintained 3 hour

- EXT8WM** White
- EXT8WMBR** Brass
- EXT8WMCH** Chrome

Weight EXT8WNM 1628g & EXT8WM 1995g

Dimensions H190 x W390 x D55mm

Legend Panels: Running man +

- LPLA** Arrow Left
- LPNA** No Arrow
- LPRA** Arrow Right
- LPUA** Arrow Up
- LPDA** Arrow Down



Exit Signs - cont'd

Hanging Exit Signs

A superb range of metal hanging exit luminaires for interior applications. Available in Non-Maintained (NM) and Maintained (M) versions. Each unit is supplied complete with 1 x metre of chain and 2 x hooks. The standard finish is a white epoxy coating but these units are also available in a quality chrome and brass finish.

- IP20
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Conforms to BS EN 60598-2-22
- Battery life is greater than 3 hours in emergency mode



ECS8WM -Shown with Legend Panel **ELRAP**



ELLAP



ELRAP



ELDAP



ELDSDAP



ELDSR/LAP

Hanging Exit Signs

8W, Non-Maintained 3 hour

- ECS8WNM** White
- ECS8WNMBR** Brass
- ECS8WNMCH** Chrome

8W, Maintained 3 hour

- ECS8WM** White
- ECS8WMBR** Brass
- ECS8WMCH** Chrome

Weight: ECS8WNM 2285g & ECS8WM 2330g

Dimensions H255 x W360 x D95mm

Legend Panels - all edge lit: Running Man +

- ELLAP** Arrow Left
- ELRAP** Arrow Right
- ELDAP** Arrow Down
- ELDSDAP** Double sided - Arrow Down
- ELDSR-LAP** Double sided - Arrow Right/Left

Exit Signs - cont'd


Recessed Hanging Exit Signs

A superb range of recessed edge lit luminaires for interior applications. Available in Non-Maintained (NM) and Maintained (M) versions. The standard finish is a white epoxy coating but these units are also available in a quality chrome and brass finish.

- IP20
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Battery life is greater than 3 hours in emergency mode



RDL8WNM -Shown with Legend **LP5LEGEND**

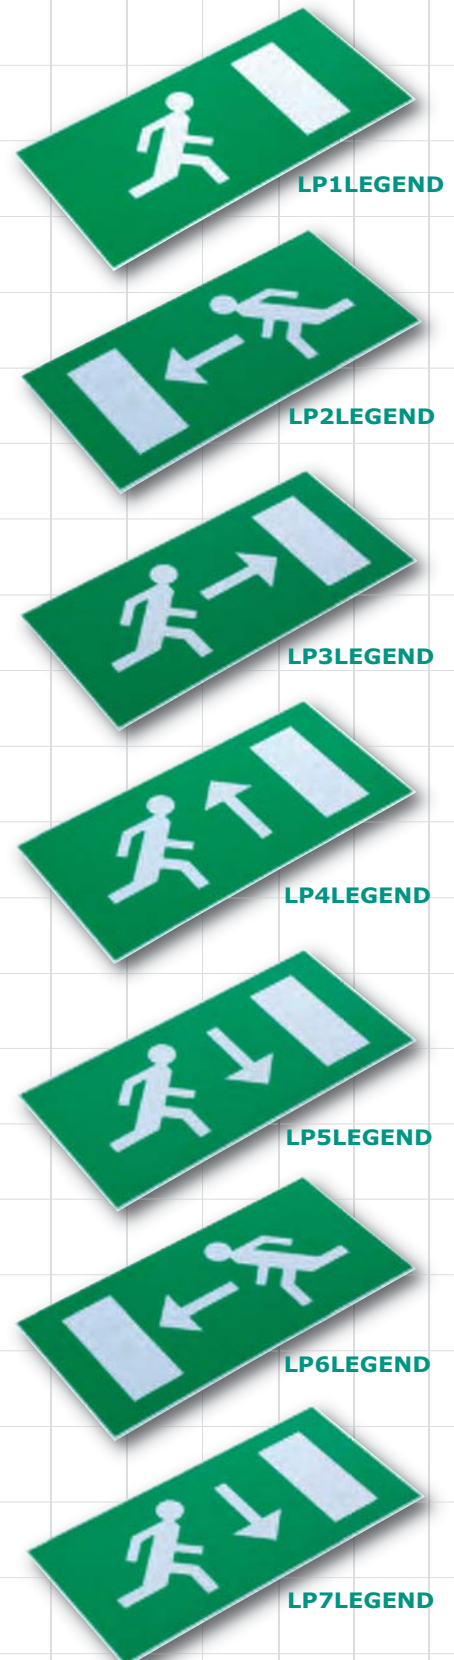

Recessed Hanging Exit Signs

8W, Non-Maintained 3 hour

RDL8WNM	White
RDL8WNMBR	Brass
RDL8WNMCH	Chrome

8W, Maintained 3 hour

RDL8WM	White
RDL8WMBR	Brass
RDL8WMCH	Chrome

Weight: RDL8WNM 3600g & RDL8WM 3800g

Dimensions H253 x W391 x D170mm

Legends: Running Man +

LP1LEGEND	No Arrow
LP2LEGEND	Arrow Left
LP3LEGEND	Arrow Right
LP4LEGEND	Arrow Up
LP5LEGEND	Arrow Down
LP6LEGEND	Double sided - Arrow Right/Left
LP7LEGEND	Double sided - Arrow Down

Fully Recessed Lighting Units

A quality range of recessed luminaires for interior applications. Available in Non-Maintained (NM) and Maintained (M) versions. The standard finish is a white epoxy coating with prismatic diffuser but these units are also available in an attractive chrome and brass finish.

- IP20
- 230V, 50Hz giving 3 hours duration of emergency lighting
- Complete with 8 watt, T5, 300mm cool white lamp
- Battery life is greater than 3 hours in emergency mode

8W, Non-Maintained 3 hours

- REC8WNM** White
- REC8WNMBR** Brass
- REC8WNMCH** Chrome

8W, Maintained 3 hours

- REC8WM** White
- REC8WMBR** Brass
- REC8WMCH** Chrome



REC8WM

Weight REC8WNM 2800g & REC8WM 3020g

Dimensions H74 x W391 x D170mm

Batteries

High Temperature Sub C & D size Ni-Cd and sealed lead acid batteries specifically designed for use in Emergency Lighting equipment. High performance zero maintenance cells for constant charging applications.

- 01-1510** 3 cell sub C 3.6V 1.5 Ah high temperature Ni-Cd
Dimensions: L 126mm, +/-2mm, Ø: 22mm, +/-1mm

- 01-1511** 2 cell D size 2.4V 4 Ah high temperature Ni-Cd
Dimensions: L 117mm, +/-2mm. Ø: 32.5mm, +/-1mm

Configured in stick format, PVC wrapped. Positive and negative tag connections for spade or solder termination.



01-1511

01-1510

- 01-1537** 12V 7Ah sealed lead acid battery
Maintenance free, leak proof battery with excellent charge acceptance and recovery capability



01-1537

Class & Carina Domed Circular Units

These CFL circular domed bulkhead luminaires are available in 16 & 28 Watt. Available in Emergency 3 hour. Maintained (M) formats. The standard product is supplied in a white base with an opal diffuser but these units are available with other options as shown below.

- IP20
- 230V, 50Hz
- Units supplied with fitted energy saving CFL lamp
- Battery life is greater than 3 hours in emergency mode



CLS16M3

16W, CFL Maintained 3 hours, Opal Diffuser

- CLS16M3** White base
- CLS16M3B** Black base
- CLS16M3BR** Brass base

28W high frequency, CFL Maintained 3 hours, Opal Diffuser

- CLS28M3HF** White base
- CLS28M3HFB** Black base
- CLS28M3HFBR** Brass base

Weight CLS16M3 2770g & CLS28M3HF 2590g

Dimensions Ø - 330mm - Depth 126mm



CAR16M3

- CAR16M3** 16W, CFL Maintained 3 hour, Brass base & Opal diffuser
- CAR28M3HF** 28W High frequency, CFL Maintained 3 Hour, Brass base & Opal glass diffuser

Weight CAR16M3 3810g & CAR28M3HF 4530g

Dimensions Ø - 350mm Depth - 140mm

Saturn Ultra Slim Circular Units

These CFL ultra slim circular metal based 'Saturn' bulkhead luminaires are available in 16, 28, 38 and 55 Watt. Available in Emergency 3 hour Maintained (M) formats. The standard product is supplied with a white powder coated base and opal diffuser but these units are available with other options as shown below.

- IP20
- 230V, 50Hz
- Supplied with fitted energy saving CFL lamp
- Battery life is greater than 3 hours in emergency mode



SAT16M3-325

16W, CFL Maintained 3 hours

SAT16M3-325	Opal diffuser - White base
SAT16M3-325BR	Opal diffuser - Brass base
SAT16M3-325CH	Opal diffuser - Chrome base
SAT16M3-325P	Prismatic diffuser - White base

28W High frequency, CFL Maintained 3 hours

SAT28M3HF-325	Opal diffuser - White base
SAT28M3HF-325BR	Opal diffuser - Brass base
SAT28M3HF-325CH	Opal diffuser - Chrome base
SAT28M3HF-325P	Prismatic diffuser - White base

Weight: SAT16M3-325 2570g & SAT28M3HF-325 2650g
Dimensions: Ø - 325mm - Depth 95mm

38W High frequency, CFL Maintained 3 hours

SAT38M3HF-425	Opal diffuser - White base
SAT38M3HF-425BR	Opal diffuser - Brass base
SAT38M3HF-425CH	Opal diffuser - Chrome base
SAT38M3HF-425P	Prismatic diffuser - White base

Weight: SAT38M3HF-425 2450g
Dimensions: Ø - 425mm - Depth 95mm

55W, CFL Maintained 3 hours

SAT55M3-525	Opal diffuser - White base
SAT55M3-525BR	Opal diffuser - Brass base
SAT55M3-525CH	Opal diffuser - Chrome base
SAT55M3-525P	Prismatic diffuser - White base

Weight: SAT55M3-525 3150g
Dimensions: Ø - 525mm - Depth 105mm

IP65 CFL Bulkheads + Emergency Trays

This range of CFL bulkheads are suitable for indoor or outdoor use, constructed from polycarbonate and have a high frequency electronic ballast. Available with either white or black base and prismatic or opal diffuser.

- F marked - suitable for installation on to normal flammable surfaces
- IP65 rated for external applications
- High Frequency Ballast
- Class 1 construction
- Polycarbonate diffuser and base
- GR8q 4 pin lamp supplied
- CE approved
- 230V 50Hz
- Battery life is greater than 3 hours in emergency mode



2DR16BP



2DR16WO



CFLTRAYR

16W CFL Round

- 2DR16BO** Opal Bulkhead - Black
- 2DR16WO** Opal Bulkhead - White
- 2DR16BP** Prismatic Bulkhead - Black
- 2DR16WP** Prismatic Bulkhead - White

16W Dimensions: Ø - 200mm Height - 80mm

28W CFL Round

- 2DR28BO** Opal Bulkhead - Black
- 2DR28WO** Opal Bulkhead - White
- 2DR28BP** Prismatic Bulkhead - Black
- 2DR28WP** Prismatic Bulkhead - White

28W Dimensions: Ø - 280mm Height - 80mm

Emergency Gear Trays

- CFLTRAYR** 28W Emergency Gear Tray for 2DR28 round fittings above



2DS28BP

16W CFL Square

- 2DS16BO** Opal Bulkhead - Black
- 2DS16WO** Opal Bulkhead - White
- 2DS16BP** Prismatic Bulkhead - Black
- 2DS16WP** Prismatic Bulkhead - White

16W Dimensions: Base - 250 x 250mm Height - 87mm

28W CFL Square

- 2DS28BO** Opal Bulkhead - Black
- 2DS28WO** Opal Bulkhead - White
- 2DS28BP** Prismatic Bulkhead - Black
- 2DS28WP** Prismatic Bulkhead - White

28W Dimensions: Base - 250 x 250mm Height - 87mm



CFLTRAYS

Emergency Gear Trays

- CFLTRAYS** 28W Emergency Gear Tray for 2DS28 square fittings above

IP44 CFL Decorative Bulkheads 16W & 28W

This IP44 range of CFL bulkheads are suitable for indoor or outdoor use, constructed from polycarbonate and have a high frequency electronic ballast. Available with either white or black base and prismatic or opal diffuser. All fittings supplied with white bezel as standard.

- F marked - suitable for installation on to normal flammable surfaces
- IP44 rated for external applications
- High Frequency Ballast
- Class 1 construction
- Polycarbonate diffuser and base
- GR8q 4 pin lamp supplied
- CE approved
- 230V 50Hz
- Battery life is greater than 3 hours in emergency mode
- Alternative black and silver bezels available
- White bezel as standard

All fittings supplied with white bezel as standard

16W

CFL16P 16W Prismatic diffuser

CFL16O 16W Opal diffuser

28W

CFL28P 28W Prismatic diffuser

CFL28O 28W Opal diffuser



CFL16O



CFL16P & CFLB16BLK

CFL16O



CFLB16BLK

CFLB16CR

Chrome/Black bezels -

Order standard white fitting + appropriate additional bezel

- Dimensions Ø CFL16 - 270mm, CFL28 - 325mm

16W

CFLB16BLK 16W Black bezel

CFLB16CR 16W Chrome bezel

28W

CFLB28BLK 28W Black bezel

CFLB28CR 28W Chrome bezel



CFLTRAYR

Emergency Gear Trays

CFLTRAYR 28W Emergency Gear Tray for CFL28 round fittings above